




Changzhou Wantai Electrical Appliance Co. Ltd

CNC Stepper Motor Driver 6 Axis Interface Board adapter

with Optical isolation, protect your PC



Product Description

Product Description

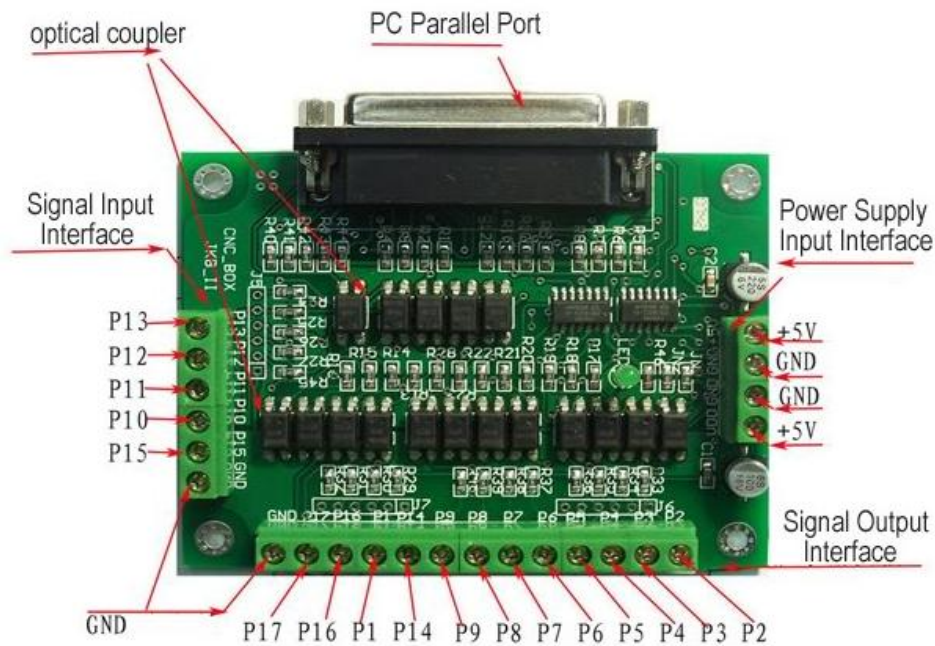



Changzhou Wantai Electrical Appliance Co. Ltd

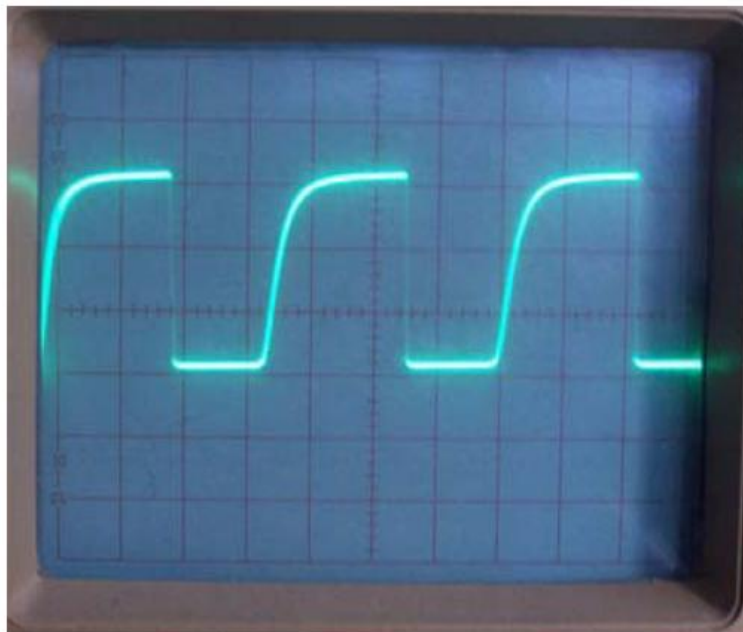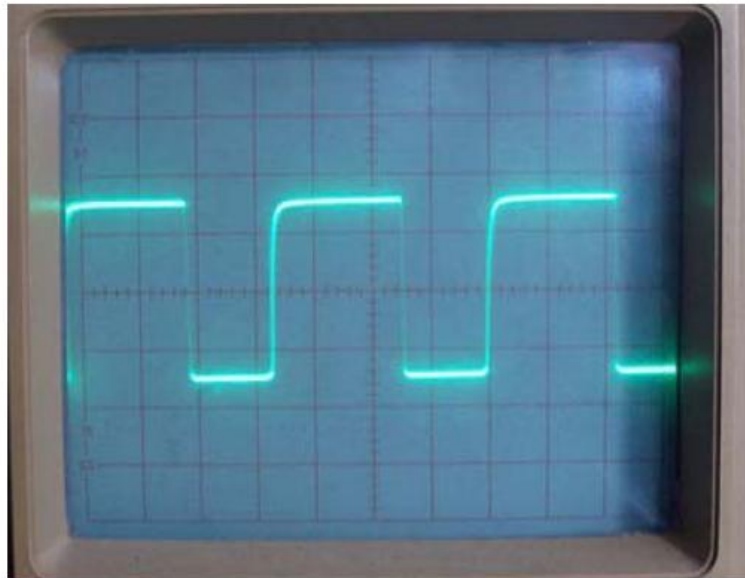

Features :

CNC Stepper Motor Driver 6 Axis Interface Board adapter

It can connection 6 drivers and control 6 motors in the same time;



Changzhou Wantai Electrical Appliance Co. Ltd

Built in DB25 male connector.

DB25 Output Pin: P1,P2,P3,P4,P5,P6,P7,P8,P9,P14,P16,P17.

DB25 Input Pin: P10,P11,P12,P13,P15.

DB25 GND Pin: P18-P25.

Power voltage is 5VDC and support with MACH3 etc. software

Built in Optical-coupler.

you can set these pins according to software as follows:

Output pin: P1,P2,P3,P4,P5,P6,P7,P8,P9,P14,P16,P17.

P2 – X axis Pulse, P3 – X axis Direction;

P4 – Y axis Pulse, P5 - Y axis Direction;

P6 – Z axis Pulse, P7 – Z axis Direction;

P8 - A axis Pulse, P9 - A axis Direction;

P14 - B axis Pulse, P1- B axis Direction;

P16 - C axis Pulse, P17- C axis Direction

Input pin: P10 ,P11, P12, P13, P15

Set them for Emergency Stop and X Y Z Limit switch



Changzhou Wantai Electrical Appliance Co. Ltd

Changzhou Wantai Electrical Appliance Co., Ltd

<http://www.wantmotor.com>

Contact: Michelle Zong

E-mail: michelle@wantmotor.com

TEL: 0086-519-85138377

FAX: 0086-519-85139178

Mobile: 0086-15061933797

MSN: yynzl@hotmail.com

Skype: michelle08070238